




ION LIGHTING™
architectural lighting & design


Project Name	
Catalog #	
Fixture Type	
Notes	

A4-LIA

4" NEW CONSTRUCTION IC AIRTIGHT LED RECESSED DOWNLIGHT HOUSING

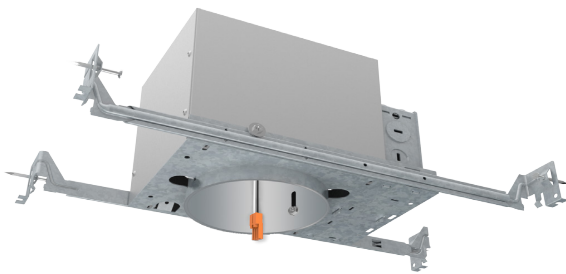

USE WITH 4" LED RETROFIT DOWNLIGHT 

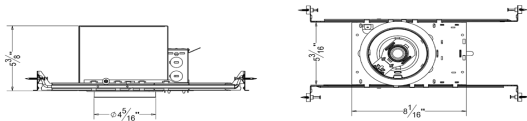

HOUSING

Die-formed aluminum for maximum heat dissipation and rust protection
Housing adjusts to 1/2" to 1 3/8" ceiling thickness. Trims are held in place with high tension clips
Housing is IC rated for direct contact with insulation and can be used in IC and NON-IC applications.

HANGER BAR

Allow housing to be positioned and locked at any point within a 24" joist span.
Can be shortened for 12" joists
Contain integral nail
Hanger fit onto T-bar spline for quick alignment

JUNCTION BOX

ETL listed for through branch wiring 1/2" and 3/4" romex wiring knockouts and four romex knockouts with integral strain clamps, all knockouts have true pry-out slots
J-Box is designed for straight through conduit runs
Removable access plates for easy installation

AIR-SHUT

Provided with gasket to prevent airflow from heated or air-conditioned spaces.
Meets or exceeds all national air flow requirements.

LISTING / WARRANTY

ETL listed to US and Canadian standards for damp location W/Feed through.
3 Years Limited Warranty.




A4-LRIA

4" REMODEL IC AIRTIGHT LED RECESSED DOWNLIGHT HOUSING



USE WITH 4" LED RETROFIT DOWNLIGHT 

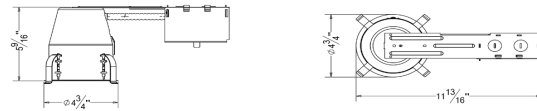

HOUSING

Die-formed aluminum for maximum heat dissipation and rust protection
Housing adjusts to 1/2" to 1 3/8" ceiling thickness. Trims are held in place with high tension clips
Housing is IC rated for direct contact with insulation and can be used in IC and NON-IC applications.

JUNCTION BOX

ETL listed for through branch wiring
1/2" and 3/4" romex wiring knockouts and four romex knockouts with integral strain clamps, all knockouts have true pry-out slots
J-Box is designed for straight through conduit runs
Removable access plates for easy installation

AIR-SHUT

Provided with gasket to prevent airflow from heated or air-conditioned spaces.
Meets or exceeds all national air flow requirements.

LISTING / WARRANTY

ETL listed to US and Canadian standards for damp location W/Feed through.
3 Years Limited Warranty.

