




ION LIGHTING™
architectural lighting & design

Project Name	
Catalog #	
Fixture Type	
Notes	

BL4-003

4" LOW PROFILE LED DISK LIGHT

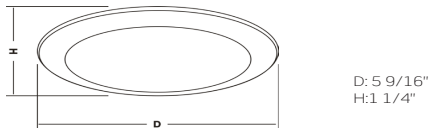

DESCRIPTION

120V LED disk light provides surface mount light for most construction. It fits most 4 inch junction boxes and can replace 5 inch and 6 inch recessed can lights to eliminate baffles. And it is suitable for use in dry, damp locations indoor/outdoor enclosed applications.

THIS FIXTURE CAN BE SURFACE MOUNTED OR RECESSED MOUNTED

DRIVER

120V 60Hz AC operation
15W 36pcs LED chips
Light source lumens: 1250; Fixture lumens: 1050
Translucent white PC opal diffuser
Two mounting screws
Philips screw driver sold separately




ORDERING GUIDE / YOUR PRODUCT CODE

SERIES	INPUT VOLTAGE	DIMMABLE
○ BL4-003 LED Recessed Disk Light	○ 120V ○ 277V ○ 120-277V	○ Non-Dimmable ○ Dimmable
LUMEN OUTPUT	CCT	FINISH
○ 1050 Lumen ○ 1250 Lumen	○ 3000K ○ 4000K ○ 5000K	○ White ○ Black ○ Satin Nickel
LED AVAILABLE		
○ Cree ○ Citizen	○ Epistar ○ Seoul	○ Osram

* Customized Also Available

BL4-013

4" LED DOWNLIGHT MODULE

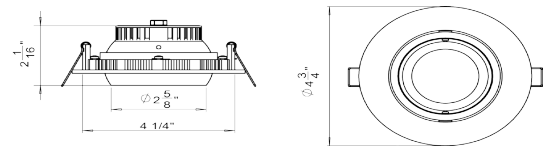

DESCRIPTION

Round 4" Gimbal fixtures with integral LEDs. Isolated external driver factory installed inside junction box. One driver for every fixture required. IC (Direct Contact with Insulation) Rated Air-Tight

REFLECTOR

120V AC 50/60 Hz (Dimmable)
277V-347V AC 50/60 Hz (Not Dimmable)
600LM / 800LM
LED 7.5W / 11W
Halogen Equivalent 50W
PF > 0.95
40° Beam Angle with 30° tilt and 360° rotation
CCT 2700K / 3000K / 4000K
CRI > 80 / 90
None Dimmable or TRIAC Dimmable



ORDERING GUIDE / YOUR PRODUCT CODE

SERIES	INPUT VOLTAGE	DIMMABLE
○ BL4-013 4" LED Downlight Module	○ 120V ○ 277V ○ 120-277V	○ Non-Dimmable ○ Dimmable
WATTAGE / LUMEN	CCT	FINISH
○ 7.5W / 600 Lumen ○ 11W / 800 Lumen	○ 2700K ○ 3000K ○ 4000K	○ White ○ Black ○ Satin Nickel
LED AVAILABLE		
○ Cree ○ Citizen	○ Epistar ○ Seoul	○ Osram

* Customized Also Available