




ION LIGHTING™
architectural lighting & design

Project Name	
Catalog #	
Fixture Type	
Notes	

BL6-003

6" BAFFLE LED RETROFIT

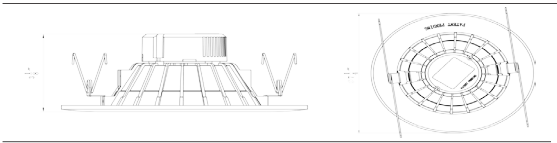

DESCRIPTION

All-in-one LED baffle retrofit trim designed to use with Liteharbor 6 inch recessed residential downlight. Trim shipped with a medium base socket adapter whip.

LED LIGHT ENGINE

Cree true white® technology available
16w max.; Luminous efficacy of light source: 100lm/w
CRI>80, Color temperature: 2700K-5000K
Rated for 50000 hours at 70% lumen output

DRIVER

Dedicated 120 volt driver
Power factor >0.9
Dimmable to 10% with most brand dimmers
Rated for 50 to 60Hz at 120V/277V input
Produces less than 20% THD




ORDERING GUIDE / YOUR PRODUCT CODE

SERIES	INPUT VOLTAGE	DIMMABLE
○ BL6-003 6" LED Downlight Retrofit	○ 120V ○ 277V ○ 120-277V	○ Non-Dimmable ○ Dimmable
WATTAGE / LUMEN	CCT	FINISH
○ 1100 Lumen ○ 1250 Lumen	○ 2700K ○ 4000K ○ 5000K	○ White ○ Black ○ Satin Nickel
LED AVAILABLE		
○ Cree ○ Citizen	○ Epistar ○ Seoul	○ Osram

* Customized Also Available

BL6-004

6" LOW PROFILE LED DISK LIGHT

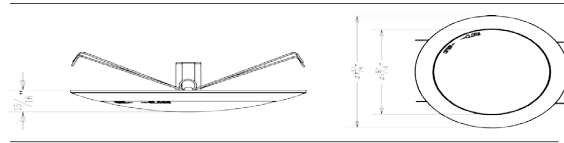

DESCRIPTION

120V LED disk light provides surface mount light for most construction. It fits most 6 inch junction boxes and can replace 5 inch recessed can lights to eliminate baffles. And it is suitable for use in dry, damp locations indoor/ outdoor enclosed applications.

THIS FIXTURE CAN BE SURFACE MOUNTED OR RECESSED MOUNTED

TECHNICAL SPECIFICATIONS

120V 60Hz AC operation
15W 28pcs LED chips
Light source lumens: 1500; Fixture lumens: 1076
Translucent white PC opal diffuser
Two mounting screws
Philips screw driver sold separately



ORDERING GUIDE / YOUR PRODUCT CODE

SERIES	INPUT VOLTAGE	DIMMABLE
○ BL6-004 6" Recessed Disk Light	○ 120V ○ 277V ○ 120-277V	○ Non-Dimmable ○ Dimmable
LUMEN OUTPUT	CCT	FINISH
○ 1500 Lumen Max.	○ 3000K ○ 4000K ○ 5000K	○ White ○ Black ○ Satin Nickel
LED AVAILABLE		
○ Cree ○ Citizen	○ Epistar ○ Seoul	○ Osram

* Customized Also Available