




**ION LIGHTING™**  
architectural lighting & design

Project Name	
Catalog #	
Fixture Type	
Notes	


LED RECESSED DOWNLIGHT HOUSING

## A6-LIA

### 6" NEW CONSTRUCTION IC AIRTIGHT LED RECESSED DOWNLIGHT HOUSING

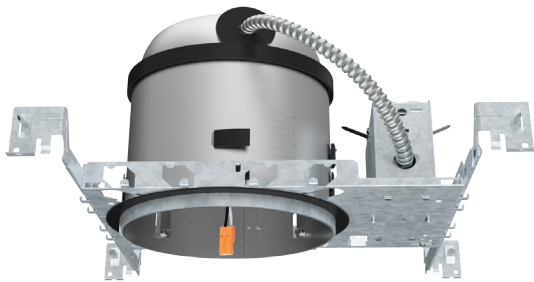

USE WITH 6" LED RETROFIT DOWNLIGHT 

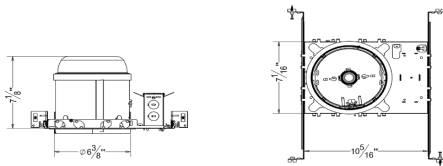

#### HOUSING

Die-formed aluminum for maximum heat dissipation and rust protection  
Housing adjusts to 1/2" to 1 3/8" ceiling thickness. Trims are held in place with high tension clips  
Housing is IC rated for direct contact with insulation and can be used in IC and NON-IC applications.

#### HANGER BAR

Allow housing to be positioned and locked at any point within a 24" joist span.  
Can be shortened for 12" joists  
Contain integral nail  
Hanger fit onto T-bar spline for quick alignment

#### JUNCTION BOX

ETL listed for through branch wiring 1/2" and 3/4" romex wiring knockouts and four romex knockouts with integral strain clamps, all knockouts have true pry-out slots  
J-Box is designed for straight through conduit runs  
Removable access plates for easy installation

#### AIR-SHUT

Provided with gasket to prevent airflow from heated or air-conditioned spaces.  
Meets or exceeds all national air flow requirements.

#### LISTING / WARRANTY

ETL listed to US and Canadian standards for damp location W/Feed through.  
3 Years Limited Warranty.




## A6-LRIA

### 6" REMODEL IC AIRTIGHT LED RECESSED DOWNLIGHT HOUSING



USE WITH 6" LED RETROFIT DOWNLIGHT 

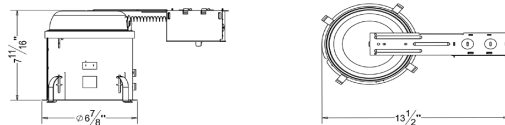

#### HOUSING

Die-formed aluminum for maximum heat dissipation and rust protection  
Housing adjusts to 1/2" to 1 3/8" ceiling thickness. Trims are held in place with high tension clips  
Housing is IC rated for direct contact with insulation and can be used in IC and NON-IC applications.

#### JUNCTION BOX

ETL listed for through branch wiring  
1/2" and 3/4" romex wiring knockouts and four romex knockouts with integral strain clamps, all knockouts have true pry-out slots  
J-Box is designed for straight through conduit runs  
Removable access plates for easy installation

#### AIR-SHUT

Provided with gasket to prevent airflow from heated or air-conditioned spaces.  
Meets or exceeds all national air flow requirements.

#### LISTING / WARRANTY

ETL listed to US and Canadian standards for damp location W/Feed through.  
3 Years Limited Warranty.

